




NOTES:

1. ALL RESISTORS ARE 0.25W 10% UNLESS OTHERWISE SPECIFIED
2. 1UF CAPS ARE TANTALUM
3. Q3/Q5 AND Q6/Q8 ARE THERMALLY COUPLED SELECTED PAIRS
4. Z1...Z4 SHOULD BE SELECTED FOR LOW NOISE AND LOW OFFSET

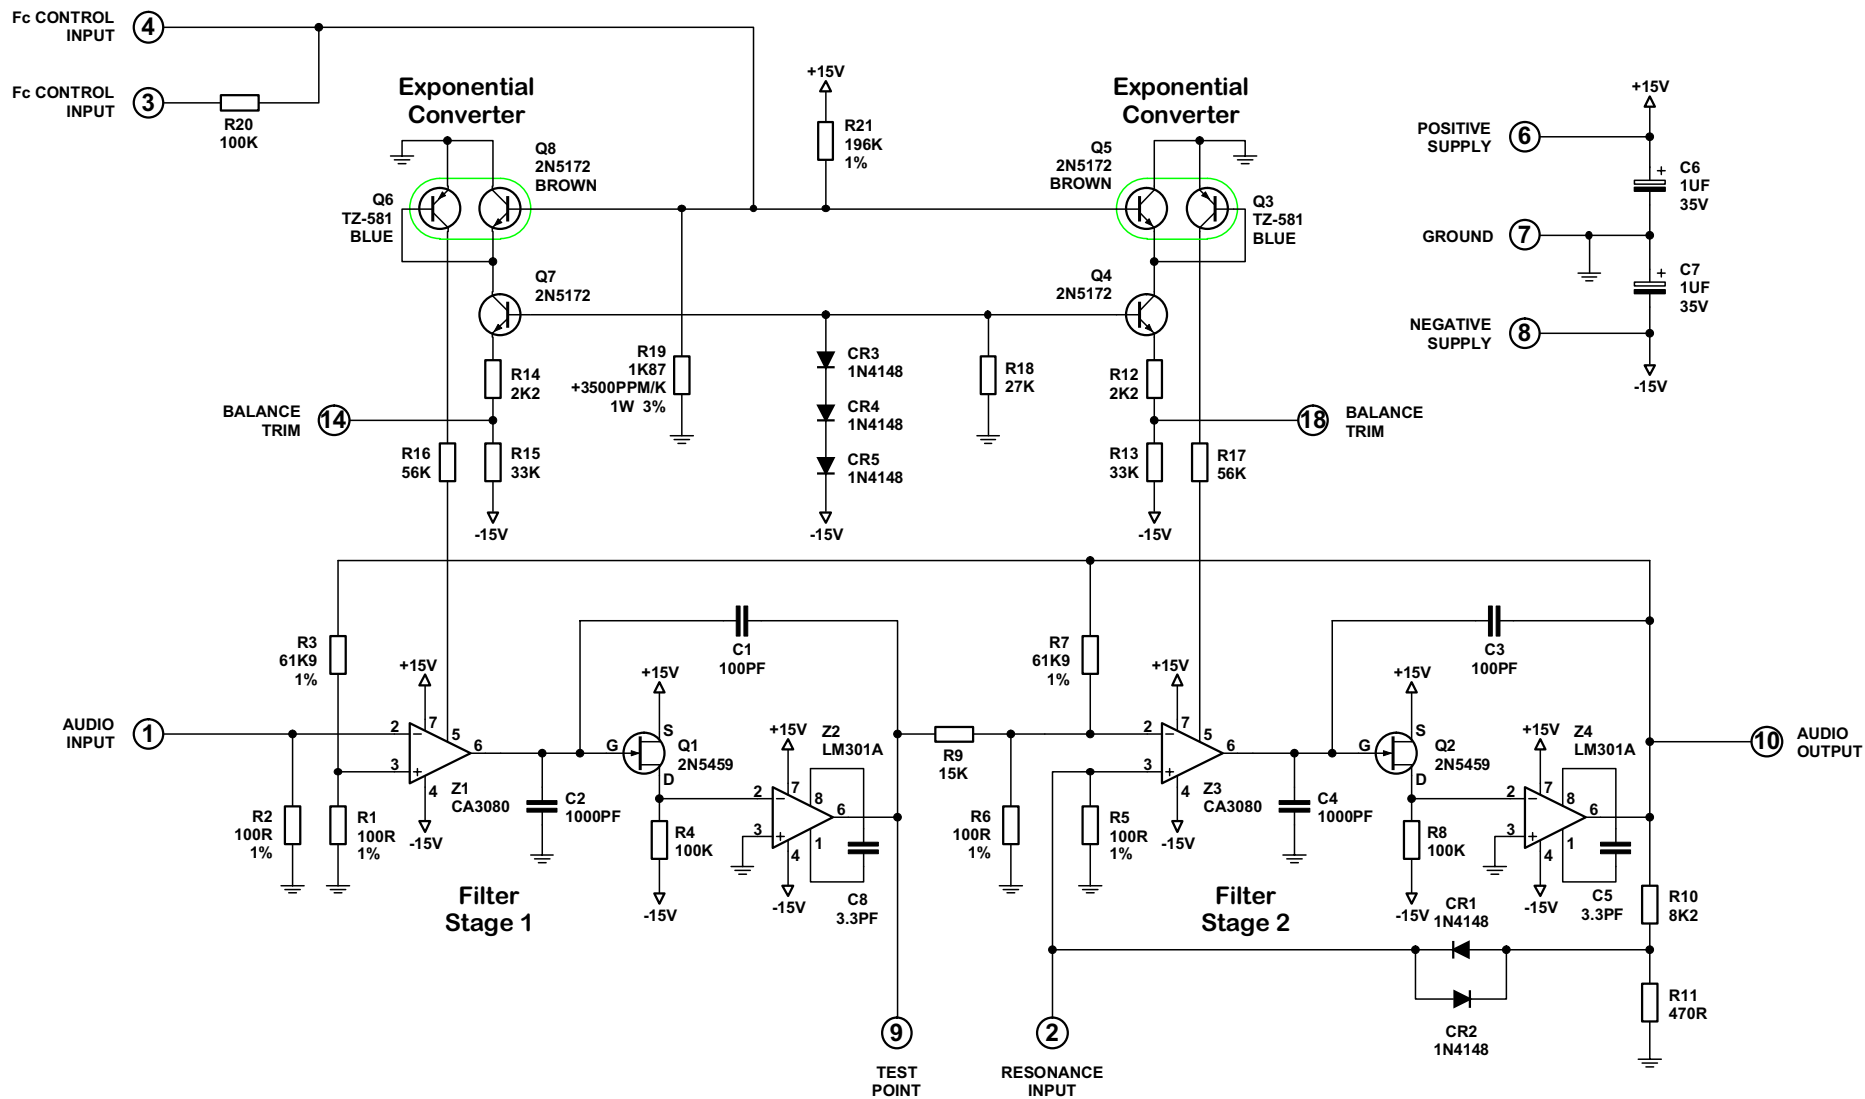

TITLE 4023 VOLTAGE CONTROLLED LOW-PASS FILTER		
DESIGN BY ARP INSTRUMENTS, INC. 1972	ASSEMBLY PATENTS US #3,805,091 US #3,444,362	
DRAWN BY J VERGHESE	DATE 20-APR-96	REV B

