

CONSOLE CONNECTOR KIT 7676 INSTALLATION INSTRUCTIONS
FOR USE WITH: THOMAS Organ Models 500, 600, 700, 800, 900 series (Dual Channel
Organs)

LESLIE Speaker Models 700, 710

When this kit has been installed the LESLIE speaker functions will be controlled by the tabs on the organ. The organ speakers may be turned off or on at the earphone switch (mounted beneath the keybed). For separate on/off control of the LESLIE speaker, console connector kit 7680 should be used.

KIT CONTENT

Console Connector Assembly	063339
Cable Assembly, 9-conductor, 30-foot	021600
oiler	053025

CAUTION: Do NOT connect the LESLIE Speaker cable directly to the Thomas Organ. Severe damage to the LESLIE Speaker 700 may result.

INSTALLATION

CAUTION: DISCONNECT ORGAN POWER BEFORE PROCEEDING:

1. On the organ amplifier locate the socket marked THOMAS LESLIE 300 OR 301 TONE CABINET. It should be visible through the opening in the back of the organ.
2. Plug the console connector into this socket.
3. Connect the cable assembly between the console connector socket and the LESLIE speaker.

Ordering Parts


Standard hardware, connectors, and electronic components should be purchased locally. Non-standard items may be obtained through a LESLIE speaker dealer. Orders should include part numbers as listed.

PARTS LIST: 063339 CONSOLE CONNECTOR ASSEMBLY


Plug Assembly, 9-pin	061879
Socket, 9-contact	028837
Sleeve, interceptor	029272

PARTS LIST: 021600 CABLE ASSEMBLY

Plug Assembly, 9-pin	061879
Socket, 9-contact	028837
Cap, body	022046
Clamp, cut	022079
Screw, machine, 6-32 x 3/8	027979

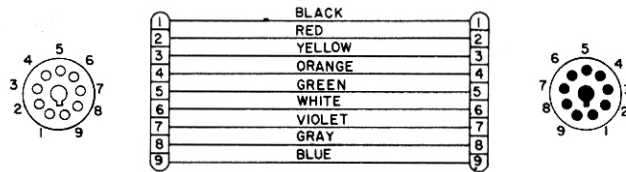

(Plug and Socket Shown from Wire End)

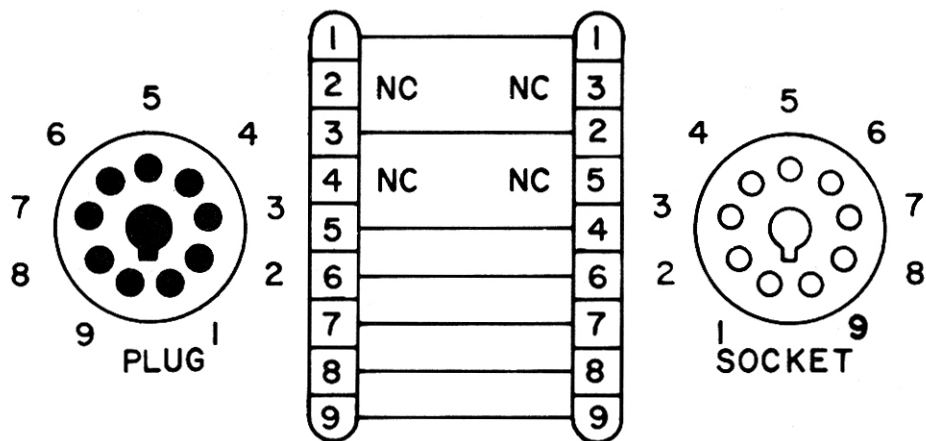

Schematic, Console Connector Assembly 063339
(Plug and Socket Shown from Wire End)