




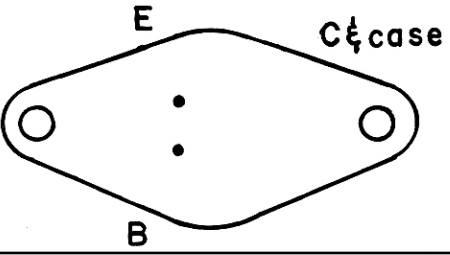






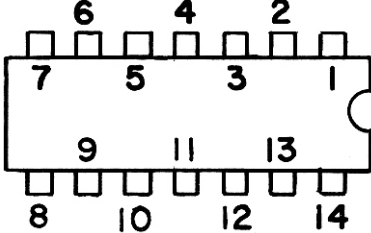

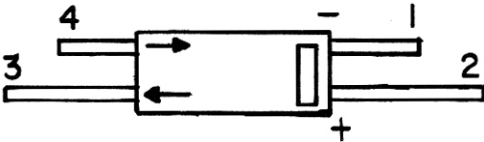






SOLID STATE DEVICES USED IN LESLIE SPEAKERS

<u>PART No.</u>	<u>REMARKS</u>	<u>PICTORIAL</u>	<u>SUGGESTED EQUIVALENTS</u>
014944	X16E 2444 GE NPN Silicone (Selected from 2N3859A) TO- 98 case	(same as 030254)	Sprague T21518
018069	RCA 40362 PNP Silicone TO- 5 case	(same as 018077)	2N4036 GE 29 Motorola HEP53031
018077	RCA 40361 NPN Silicone TO- 5 case		2N2102, 2N3036 2N4238, 2N4350 Motorola HEP243 RCA SK3024 Sylvania ECG128
020156 (Old No.201-15)	2N404 PNP Germanium TO- 5 case		2N525, 2N1307 2N1309, 2N1370 GE GE2 Motorola HEP739 Sylvania ECG102
021154 (Old No.100-15) (Old No.525-24)	1N2859A Diode 100PIV 1 AMP		1N1230, 1N3189 1N4002, 1N4817 1N5054 GE GE504A Motorola HEP156 RCA SK3016 Sylvania ECG116
022939	RCA 40321 NPN Silicone TO- 5 case		2N3440 GE GE32 RCA SK3021 Sylvania ECG124
023606	2N5163 FET "N" Channel		2N3819, 2N4303 MPF102 GE FET-2 Motorola HEP802 RCA SK3116 Sylvania ECG132
023754	2N3054 NPN TO- 66 case		2N4273 GE66 Motorola HEP 241 HEP 703 Sylvania ECG152

023762	2N3055 TO- 3 case	(same as 023754)	2SD45, 40363 40411 GE 14 RCA 62004
025056	1N4004 Diode 400PIV 1 AMP TO-41 case		1N1222, 1N1234 1N4005, 1N4006 1N4820, 1N4937 1N5060 1N2613 GE GE504A Motorola HEP157 RCA SK3016 Sylvania ECG116
026237	SPS 4382 NPN (Selected for low noise) TO-92 case		2N5088, 2N5089 2N3642, 2N3707 2N2925, 2N3391 GE GE 20 Motorola HEP730 RCA SK3020 Sylvania ECG123A
030254	2N3414 NPN TO- 98 case		2N697, 2N3642 2N4954 GE GE 20 Motorola HEP50002 RCA SK3020 Sylvania ECG123A
030387 (obsolete)	C106B4 SCR 200 PIV 1 AMP		C106D4 Motorola HEPR1221
031450	1N5402 (RCA) Diode 200 PIV 1 AMP	(same as 025056)	1N4721, 1N4141 Motorola HEPO092 RCA SK3060 Sylvania ECG117
031997	C106D4 SCR 400PIV 1 AMP	RCA SYLVANIA GE  (same as 030387)	Motorola HEPR1222 Sylvania ECG5457 RCA S2060D
033563	2N4425 NPN Silicone TO-98 case in heat sink	(same as 030254)	2N3404, 2N3405 2N3416 GE GE 20 Motorola HEP3024 RCA SK3020 Sylvania ECG123A
033571	T2-525 PNP Silicone TO- 98 case in heat sink	(same as 030254)	2N907, 2N4036 2N4354 Motorola HEPS3031 RCA SK3114

033589	T2-554 PNP Silicone TO- 98 case	(same as 030254)	2N1132 2N3671 T2525 Motorola HEP52 RCA SK3114 Sylvania ECG159
041616	1N458A Diode 30 PIV 500MW		1N3894 GE GE504A Motorola HEP156 RCA SK3016 Sylvania ECG177
055228 (Old No. 525- 212)	1N4006, FB Diode 800PIV 1 AMP	(same as 025056)	GE GE509 Motorola HEP159 RCA SK3032 Sylvania ECG125 1N4585
061366 (Old No.6136)	2N3859A NPN Silicone TO- 98 case	(same as 030254)	2N3416, T21518 GE GE17 Motorola HEP736 RCA SK3122 Sylvania ECG123A 014944
067561	40669 Triac Silicone 400PIV 8 AMP		Motorola HEPR1725 2N6374N GE SC146D Sylvania ECGJ635
069682 (obsolete)	GEL301F1 GE integrated Circuit (Phase Control)		
104680	MV5013 LED Light emitting diode		
104790	W04M Rectifier silicone single phase bridge miniature Gen. Instruments 400V PIV 1.5 AMP		
109690	SFC4031 integrated Circuits (Toggle flipflop)		MDC4040 Motorola HEPC6007
	206A case		

109700	D13T1 Programable Unijunction TO- 98 case	G. E. 	MOTOROLA 	2N6027, 2N6028, Motorola HEP59001
112640	LM307N integrated Circuits (OP AMP) (Molded dual- inline package)		1. N.C. 8. N.C. 2. INPT. 2 3. INPT. 3 4. V- 5. N.C. 6. OUT 7. V+	
118040	MLM301API integrated Circuit (OP AMP) Motorola 626 case		1. OFFSET 2. INV. INPT. 3. NON. INV. INPT. 4. V- 5. OFFSET NULL 6. OUTPUT 7. V+ 8. FREQ. COMP.	
118870	1N754A (Motorola) ZENER	(same as 025026)		
130800	SCR 400PIV 4 AMP (Selected from 031997)	(same as 031997)		GE C106D4 Sylvania ECG5457 RCA S2060D
		(same as 031997)		
131300	1N920 Diode			GE DA1703 TI 1N4152 Fairchild 1N4727
131310	2N5131 TO- 106 case	(SAME AS 131330)		
131320	2N3904 NPN Silicone TO- 92 case	(SAME AS 026237)		2N3416, 2N3859A, 2N4238, 2N4410, GE GE18, Motorola HEP736 RCA SK3024 Sylvania ECG123A
131330	2N3565 NPN Silicone TO- 106 case			2N2924, 2N2925, 2N3391, SE-4002, GE GE 20, Motorola HEP55, Sylvania ECG123A