


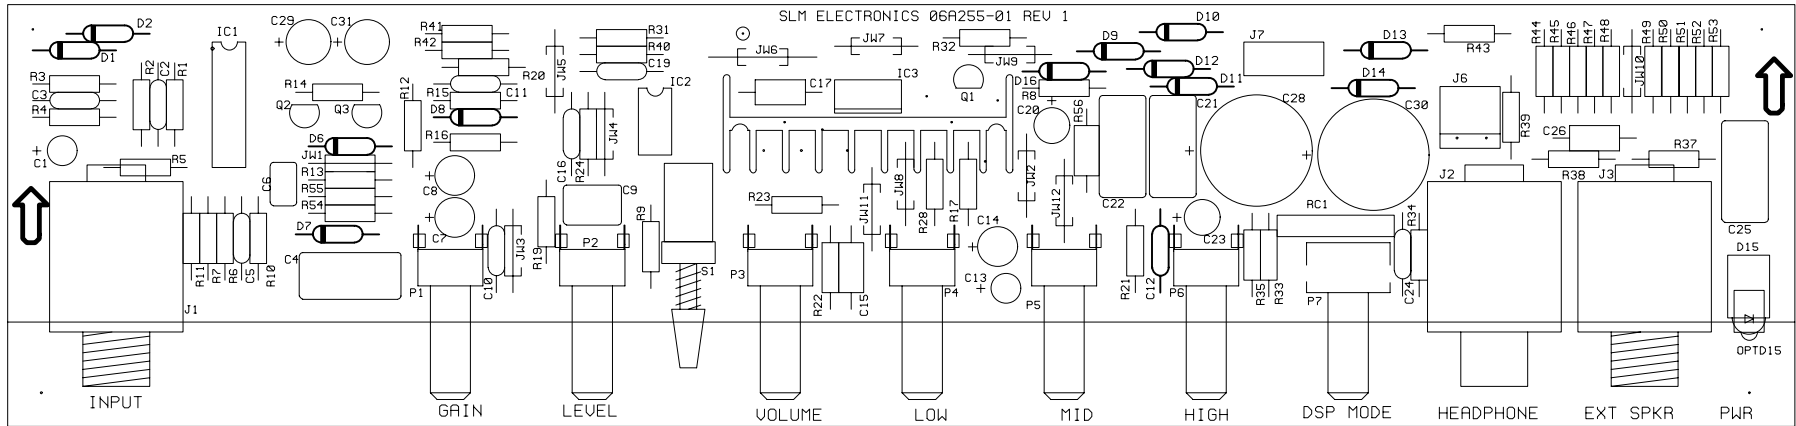

REF	DES	PART #	DESCRIPTION	
C1		12R225-50	2.2uF	50V
C2		10A101-21	100pF	200V
C3		10A102-11	.001uF	100V
C4		10F224-03	.22uF	100V
C5		10A332-01	.0033uF	100V
C6		10R153-03	.015uF	100V
C7		12R105-50	1uF	50V
C8		12R105-50	1uF	50V
C9		10R104-03	.1uF	100V
C10		10A102-11	.001uF	100V
C11		10A101-21	100pF	200V
C12		10A222-11	.0022uF	100V
C13		12R225-50	2.2uF	50V
C14		12R105-50	1uF	50V
C15		10A473-11	.047uF	100V
C16		10A101-21	100pF	200V
C17		10A104-01	.1uF	50V
C19		10A101-21	100pF	200V
C20		12R106-35	10uF	35V
C21		10F224-03	.22uF	100V
C22		10F224-03	.22uF	100V
C23		12R106-35	10uF	35V
C24		10A223-01	.022uF	50V
C25		10F224-03	.22uF	100V
C26		10A104-01	.1uF	50V
C28		12-228-26	2200uF	25V
C29		12R226-16	22uF	16V
C30		12-228-26	2200uF	25V
C31		12R226-16	22uF	16V
D1		21A914-01	1N914	100V/0.1A
D2		21A914-01	1N914	100V/0.1A
D6		21A914-01	1N914	100V/0.1A
D7		21A914-01	1N914	100V/0.1A
D8		21A914-01	1N914	100V/0.1A
D9		21A402-01	1N4002	100V/1A
D10		21A402-01	1N4002	100V/1A
D11		21A402-01	1N4002	100V/1A
D12		21A402-01	1N4002	100V/1A
D13		21A402-01	1N4002	100V/1A
D14		21A402-01	1N4002	100V/1A
D15		21-224-01	RED	LED
D16		21A914-01	1N914	100V/0.1A
IC1		37-074-01	TL074	
IC2		37-072-01	TL072	
IC3		37-230-02	TDA2030V	
J1		39-116-01	T/S	JACK
J2		39-117-01	T/R/S	JACK
J3		39-116-01	T/S	JACK
J6		17-309-02	CONN	LOCKING
J7		17-310-03	156	HEADER

REF	DES	PART #	DESCRIPTION	
JW1-JW12		76-000-05	JUMPER	
P1		70-103-91	LINEAR	
P2		70-254-91	LINEAR	
P3		70-103-92	AUDIO	
P4		70-103-92	AUDIO	
P5		70-501-92	AUDIO	
P6		70-103-91	LINEAR	
P7		70-103-61	10K	LINEAR
Q1		96R112-01	J112	
Q2		96R510-01	2N5210	
Q3		96R510-01	2N5210	
R1		76-222-01	2.2K	
R2		76-274-01	270K	
R3		76-222-01	2.2K	
R4		76-152-01	1.5K	
R5		76-222-01	2.2K	
R6		76-223-01	22K	
R7		76-681-01	680	
R8		76-225-01	2.2M	
R9		76-222-01	2.2K	
R10		76-152-01	1.5K	
R11		76-223-01	22K	
R12		76-102-01	1K	
R13		76-473-01	47K	
R14		76-473-01	47K	
R15		76-103-01	10K	
R16		76-473-01	47K	
R17		76-223-01	22K	
R19		76-473-01	47K	
R20		76-153-01	15K	
R21		76-332-01	3.3K	
R22		NOT USED		
R23		76-222-01	2.2K	
R24		76-473-01	47K	
R28		76-102-01	1K	
R31		76-104-01	100K	
R32		76-683-01	68K	
R33		76-102-01	1K	
R34		76-470-01	47	
R35		76-101-01	100	
R37		76-010-01	1	
R38		76-471-01	470	
R39		76-470-01	47	
R40		76-473-01	47K	
R41		76-221-01	220	
R42		76-221-01	220	
R43		76-152-01	1.5K	

REF	DES	PART #	DESCRIPTION	
R44		76-010-01	1	
R45		76-010-01	1	
R46		76-010-01	1	
R47		76-010-01	1	
R48		76-010-01	1	
R49		76-010-01	1	
R50		76-010-01	1	
R51		76-010-01	1	
R52		76-010-01	1	
R53		76-010-01	1	
R54		76-223-01	22K	
R55		76-473-01	47K	
R56		77-100-01	10	1/2W
RC1		99-195-17	RIBBON CABLE	
S1		88-302-03	DUAL SWITCH	
		33-047-01	HEATSINK	
		30-011-01	RIVSCREW	
		06A255-01	PC BOARD	

REF DES C18, C27, D3,4,5, J4,J5,R18,25,26,27, R29, R30, AND R36 ARE NOT USED

2	4/13/2000	L1_TO_R56_1/2W_RES_&_P7_VALUE_CHG	N00288	
1	10/14/98	ART_&_DRILL_TO_REV_1_PICT_TO_MATCH	EC0980528	
SIGNATURES:		DATE:	 11880 BORMAN DR. ST. LOUIS, MISSOURI 63146	
DRAWN:	RLB	6-8-98		
CHK'D:	TEK	6-8-98	PROJECT NAME:	
APP'D:	TEK	6-8-98	GFX-15_GUITAR_AMP	
ORIGINAL ISSUED:		00/00/00	DRAWING NAME:	
PLOT DATE:		6-8-98	PICTORIAL	
PLOT TIME:		2:00	DRAWING NO.	07P255-01
FILE NAME:		25501B1_	SCALE:	-
			SHEET:	1_OF_1