

CONSOLE CONNECTOR KIT 7820 INSTALLATION INSTRUCTIONS
FOR USE WITH: Various one- and two-channel organs
LESLIE Speaker Model 130

KIT CONTENT

Adapter, Y, multiple cabinets	137469
Cable Assembly, 11-conductor, 30-foot	137357

This kit is used in conjunction with a console connector kit which provides controls and connections between the organ and the LESLIE speaker. Consult the LESLIE speaker dealer for the proper kit.

INSTALLATION

I. If the console connector has not been installed on the organ, install it according to the instructions in its kit; however, do not connect the 30-foot cable (included in the console connector kit) to the organ.

If the console connector kit has already been installed, disconnect the 30-foot cable at the console connector.

2. Connect plug P1 of the Y adapter (see schematic) to the round, 11-contact socket on the console connector installed inside the organ.

3. Connect the 30-foot cable from this kit to one of the sockets on the Y connector; the other end of the cable connects to plug P1 of one of the speakers. Plug P1 is at the lower left corner of the cabinet, viewing it from the rear.

4. Use the 30-foot cable from the console connector kit or installation to attach the second speaker to the second socket of the Y connector.

5. Connect each speaker to a suitable power source by means of the cable attached to the speaker.

MULTIPLE INSTALLATION

If it is desired to use more than two speakers with one organ this can be accomplished with additional Yadapters. The number of adapters required is one less than the number of LESLIE speakers to be used. (For four speakers use three adapters; for five speakers use four adapters.) One cable is required for each speaker.

Connect the plug of the first adapter to the console connector installed in the organ. Connect the second (and third, if required) adapter to a socket of the first adapter. Connect the cable to the last adapter and then to the speaker. (See figure 1.)

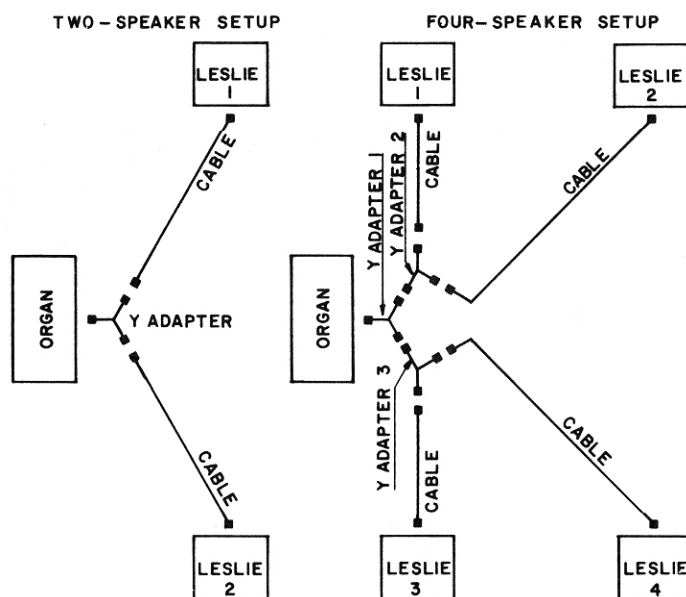


Figure 1. Interconnections

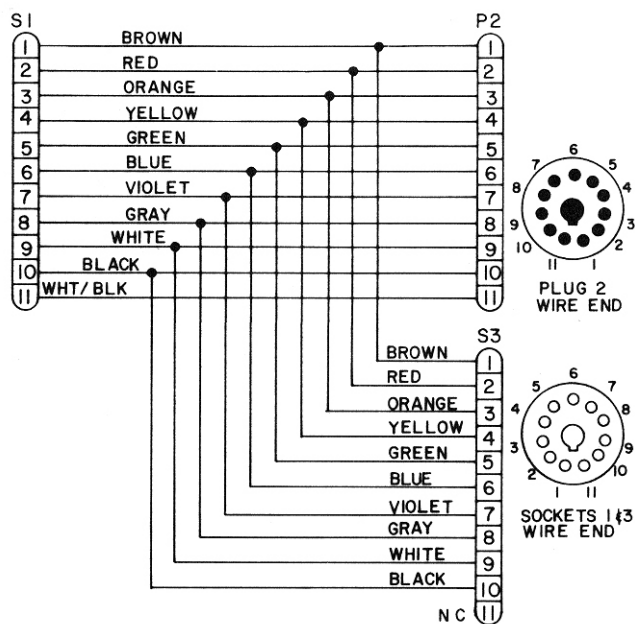


Figure 2. Schematic, Y Adapter

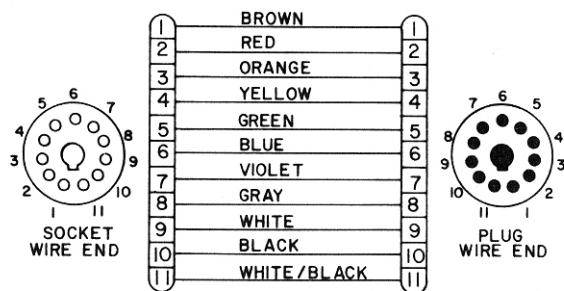


Figure 3. Schematic, Cable Assembly