

LESLIE 9550 CONSOLE CONNECTOR KIT INSTALLATION INSTRUCTIONS

For use with: ALL LOWREY Organ models with "EXT. LESLIE" socket

LESLIE 825, 825U Speaker

MULTIPLE SPEAKER INSTALLATION: For complete information, see the service manual of the LESLIE Speaker to be added.

KIT CONTENTS :

1 Console Connector	054635	1 TREMOLO CONTROL
1 9-Conductor Cable	021600	Brown 043281
4 Insulated Staples	028464	Ebony 043299
2 Wood Screws, 6 x 1/2	029124	Ivory 043307

TO INSTALL THE KIT:

1. Remove the Lowrey back cover.
2. Plug the console connector into the "EXT. LESLIE" socket on the Lowrey amplifier.
3. Attach the tremolo control to the wooden rail in front of the lower manual of the Lowrey. Use the black oxide wood screws provided.
4. If there is no hole in the underside of the lower manual, drill a 1" hole there near the mounted tremolo control.
5. Route the tremolo control cable through the hole to the white socket on the console connector; plug in. Then fasten the tremolo control cable to the organ interior with the staples provided in the hardware kit.
6. Replace Lowrey back cover. Attach the 9 conductor cable provided to the 9 contact console connector socket and the 825 power plug. Installation is now complete.


TO OPERATE THE 825 OR 825U SPEAKER: Depress LOWREY 's "ORGAN and "LESLIE "tabs to the "Leslie" and "External " positions respectively. Then experiment with the other LOWREY controls to achieve the desired LESLIE effects.

TREMOLO CONTROL PARTS LIST

Tremolo Switch Case		Switch Case Cover	
Brown	040543	Brown	048702
Ebony	040550	Ebony	048710
Ivory	040568	Ivory	048728
Switch Knob		Switch Retainer (2 req'd)	
Brown	048066	P2 Plug Hsing, Nat.-Molex	042085
Ebony	048074	P2 Insert, Male (3 req'd)	023309
Switch Only	010249		

CONSOLE CONNECTOR MOLEX HOUSING

S2 Socket Hsing, Nat.-Molex 042077
S2 Insert, Female (3 req'd) 023556

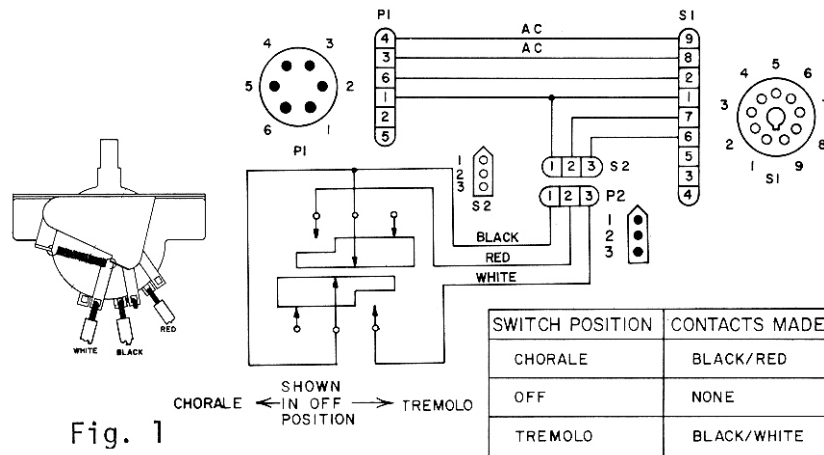

ORDERING PARTS:

Standard hardware, connectors, and electronic components should be purchased locally. Non-standard items may be obtained through a Leslie speaker dealer. Orders should include part numbers shown above.